



SLABS

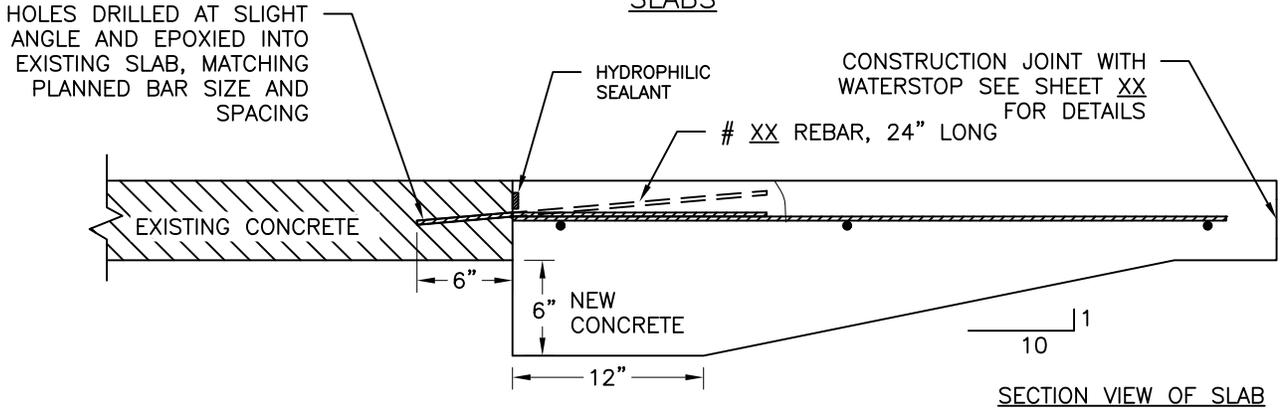

WALLS

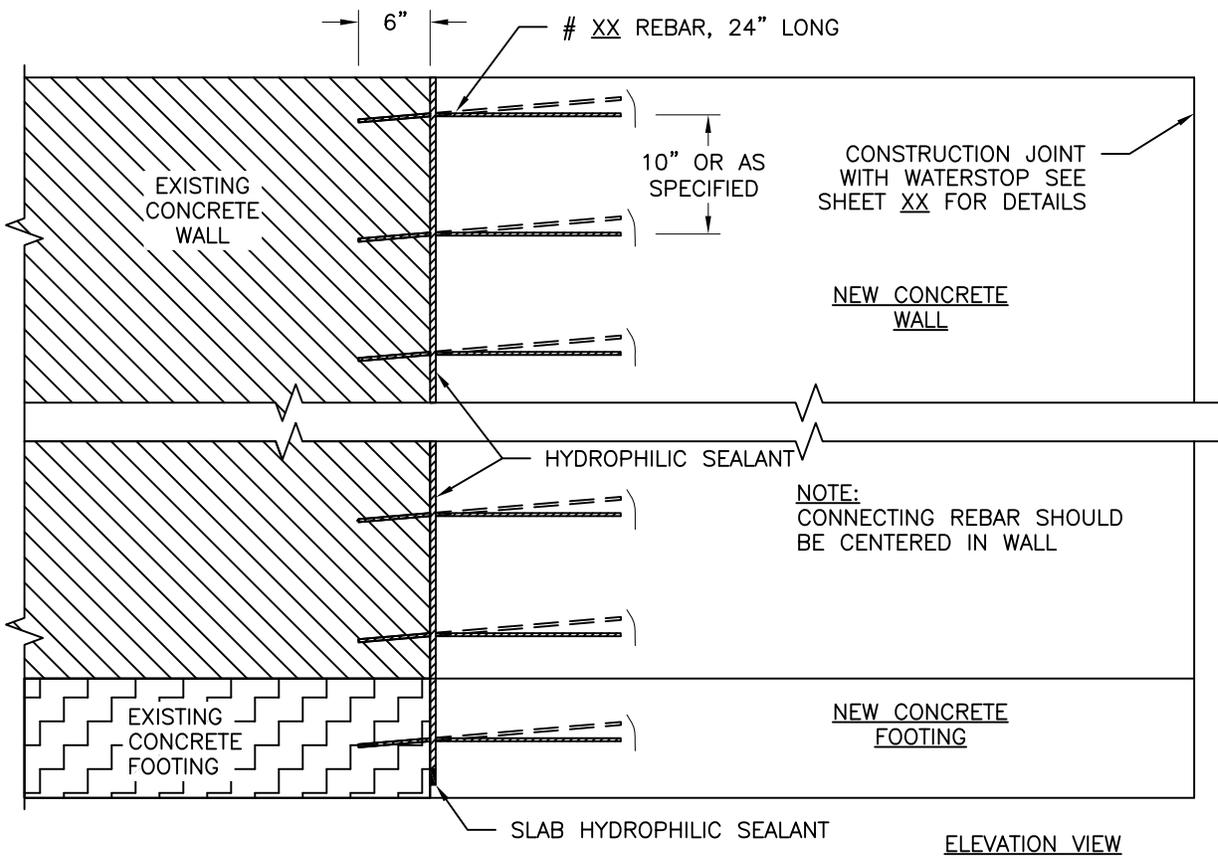

NOTES

1. DRILL HOLES, THE SAME DIAMETER AS THE BARS, INTO EXISTING CONCRETE. DRILL AT A SLIGHT ANGLE AT SPACING OF REBAR IN NEW CONCRETE. DUST NEEDS TO BE REMOVED.
2. POUR EPOXY INTO HOLES AND POUND REARS INTO PLACE. **NOTE:** IF PASTE EPOXY IS USED, HOLES MAY BE DRILLED HORIZONTAL. APPLY PASTE EPOXY TO BARS BEFORE INSERTING THEM INTO HOLES.
3. APPLY HYDROPHILIC SEALANT PER MANUFACTURER'S RECOMMENDATION.
ACCEPTABLE SEALANT IS _____
4. BEND REARS TO HORIZONTAL AND TIE NEW REARS TO THEM.



United States
Department of
Agriculture

Natural Resources
Conservation Service

**LIQUID TIGHT CONNECTION TO
EXISTING CONCRETE**

CLIENT: _____
COUNTY: _____

Date _____
Designed _____
Drawn _____
Checked _____
Approved _____

File Name
WI-551
Date
07/14
Sheet of