


Notch Top and Bottom Logs by 1/3D

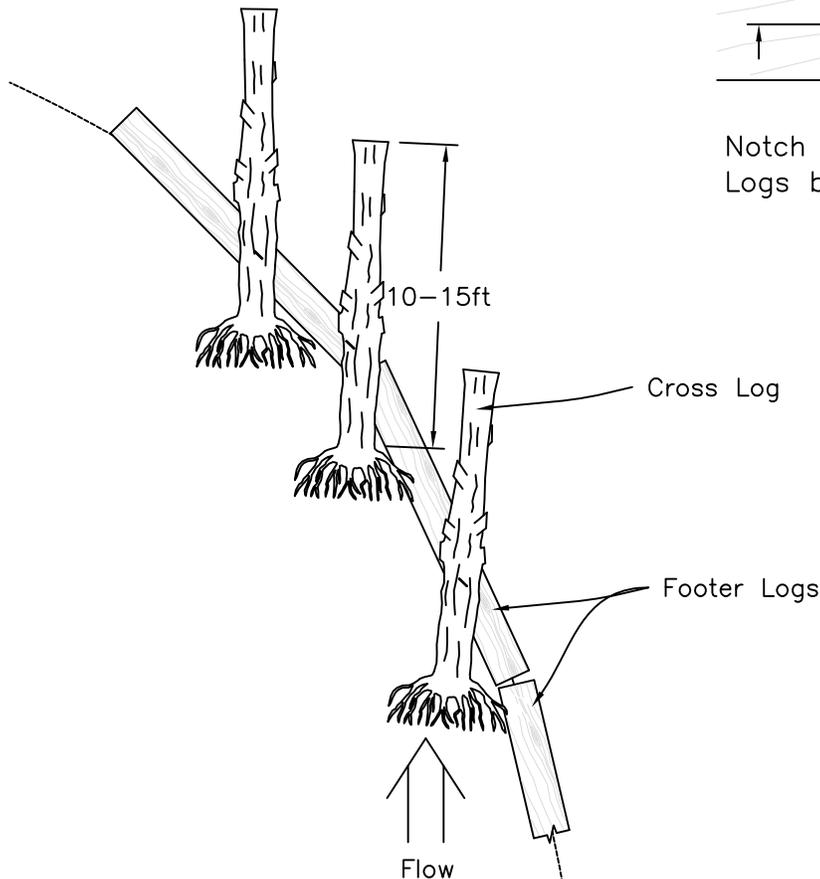

Notes:

A minimum of two cross logs per Footer log is required to anchor Footer log. Secure Cross logs using soil anchors and/or rock bolsters. Size anchoring based on the buoyancy force on the logs when completely submerged then subtract the downward force from the backfill.

Conceptual Plan Not for Construction

Drawings not to scale



LOG TOE PROTECTION – LOW BANK

Designed K. Worster, J. Fripp Date 03/08
 Drawn J. Renteria 03/08
 Checked _____
 Approved _____

File Name	LogRevetment-lowbk.dwg
Drawing Name	LogRevetment-lowbk
Date	03/26/08
Sheet	of