



END VIEW

NOTES:
 A 6" wide Concrete frost wall around perimeter of concrete floor to frost depth shall be considered where ground frost is a problem.

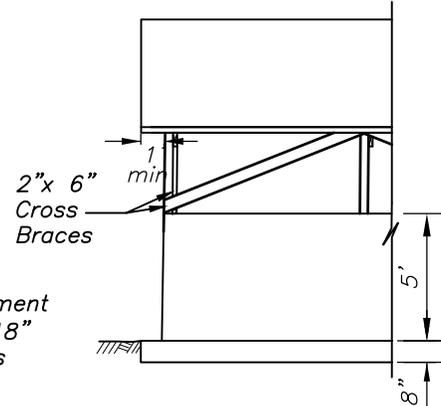

PARTIAL REAR ELEVATION

- NOTES:
1. All lumber except rafters, purlins, knee braces/gussets & cross braces shall be pressure treated.
 2. Attach purlins to rafters with manufactured framing anchors. Purlin joints shall overlap above rafters.
 3. Attach cross braces to each post with 4-16d ring shank nails or 1 bolt with nut and 2 washers.

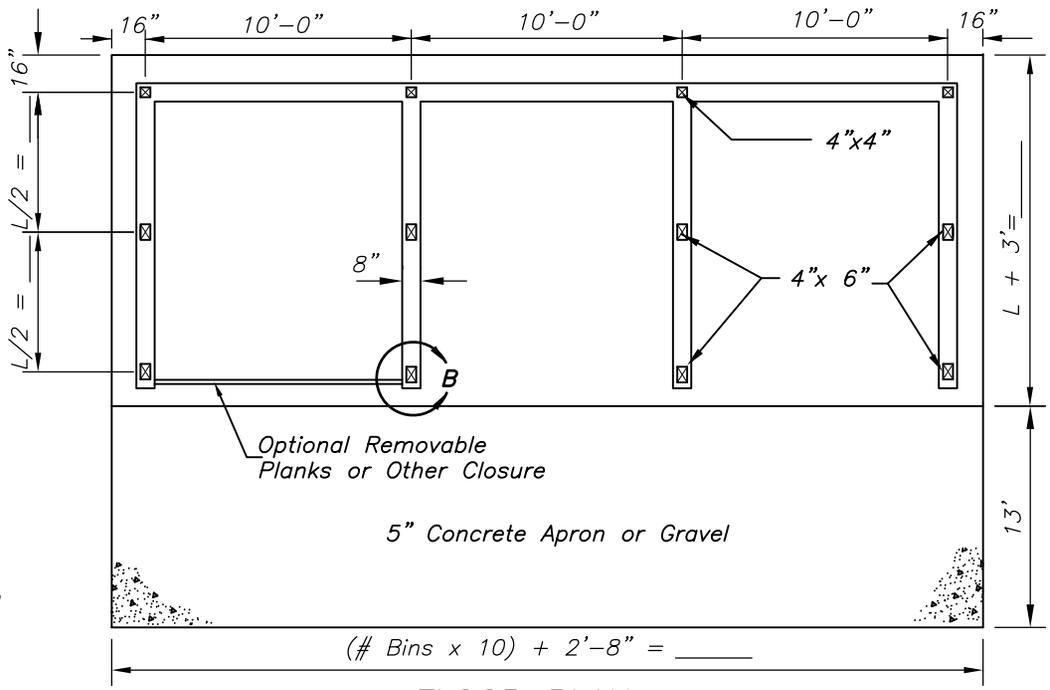

FLOOR PLAN

NOT TO SCALE

DRAFT
 NOT FOR
 CONSTRUCTION

Date	
Designed	
Drawn	
Checked	
Approved	

**SWINE COMPOSTING FACILITY
 5' REINFORCED
 CONCRETE STRUCTURE
 GENERAL LAYOUT**



File Name	
Drawing Name	29-L-654